

**INFRARED SOLUTIONS - SYSTEMS & SERVICES**



**irPOD.net**  
INFRARED-CAMERA-CONFIGURATOR  
[www.irPOD.net](http://www.irPOD.net)

**NEW**

**InfReC**  
InfraRed Camera

## Fixed Mount Type Thermal Imaging Camera

High Performance, High Image Quality for Network Solutions

**InfReC TS600 series**

## Various solutions for monitoring/ surveillance systems

Suitable design for contributing to various applications,  
monitoring process control or surveillance with  
adoption of general purpose protocol.

High  
Sensitivity

High  
Accuracy



High  
Temperature  
Range




irPOD.net

## System Construction examples



### Temperature monitoring of Die Cast/Molds

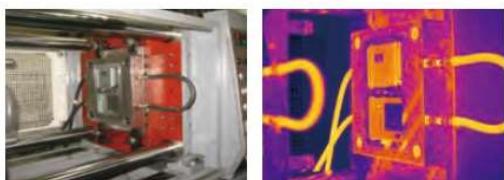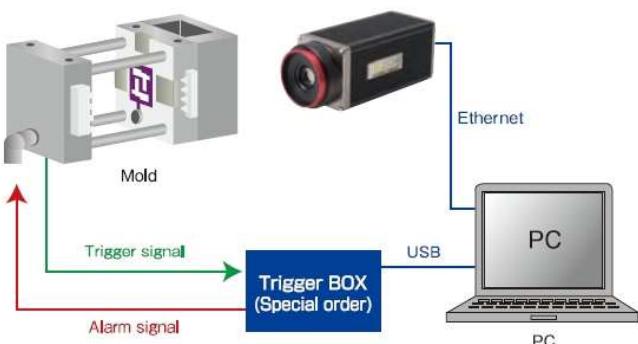


### Temperature Monitoring of Ladle for melting steel

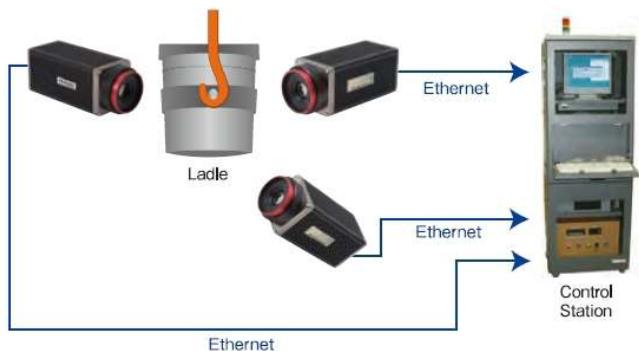

### Fire Monitoring of Refuse Bunker

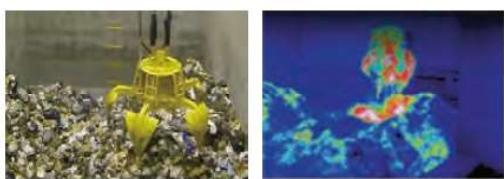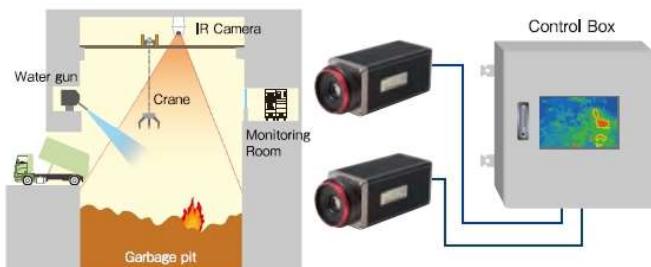

### Fire Monitoring of Coal Conveyer

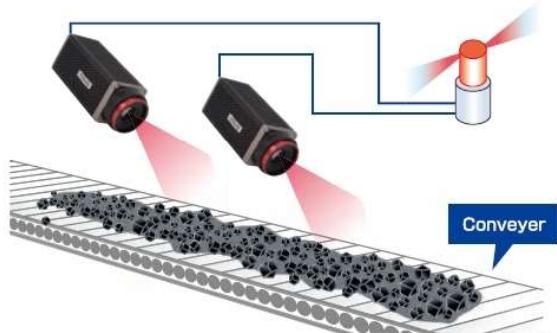

## Others

### SDK for programming the camera is standard equipped.

Software development kit (SDK) is provided as a standard accessory so that system integrators or customers can write their own programs.

### Enables direct camera setting by Remote controller, not via network.(Option)

Simple and efficient camera setting at the adjustment of camera installation or at the time of maintenance.

### High flexibility of support by special order basis


Variety of customization possible as a special order on Lens, Housing, control panel, etc.



## High Quality, High Resolution, Excellent Basic Performance

### Latest VGA sensor technology for high image quality

New sensor provides both high sensitivity and high resolution (640 × 480 pixels) with clear and high thermal image quality.

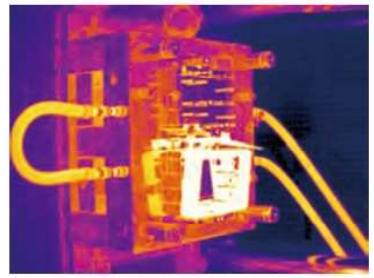

Die Cast Mold

### Highly accurate temperature measurement ( $\pm 2^{\circ}\text{C}/2\%$ )

This meets market needs for highly accurate temperature sensing, such as in process monitoring or fire prevention monitoring.

### Temperature range up to 1500°C


Enables market needs of such as monitoring the temperature of die casting molds, monitoring the temperature of furnace materials and steel mills and plants, and measuring the temperature of metal or glass products, etc.

## Adoption of Generally used Protocol

### Adoption of generally used Modbus TCP for Distributed Control System(DCS)

Cameras can be added on to existing control systems by connecting to Modbus-compatible devices of DCS via Ethernet.

#### Network example of Distributed Control System (DCS)

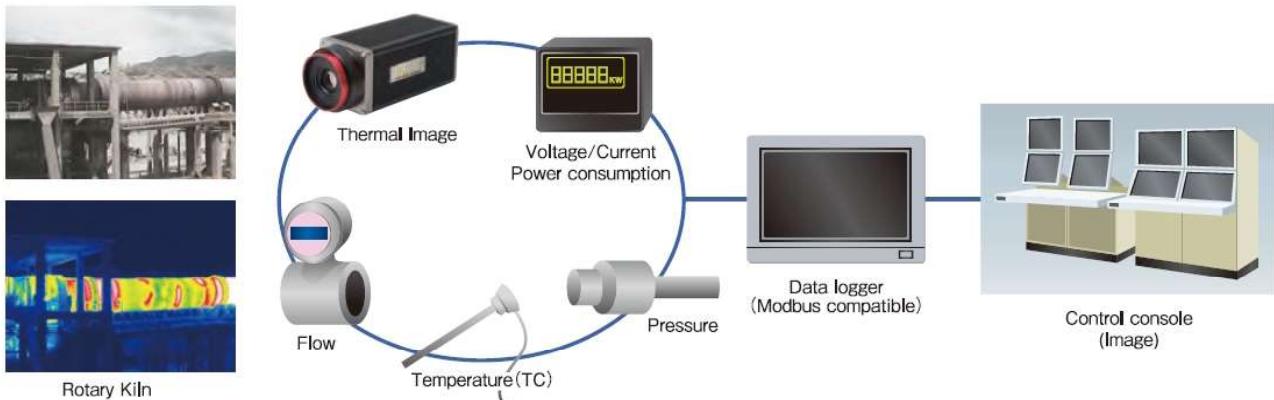

### ONVIF protocol generally used in video surveillance


Support for the ONVIF protocol generally used in video surveillance enables these cameras to be added on to existing camera network systems.



Security


## Enhancement of alarm function on camera itself

Divided into as many as 32 areas using straight, polygon and curved lines. Masking unnecessary area.

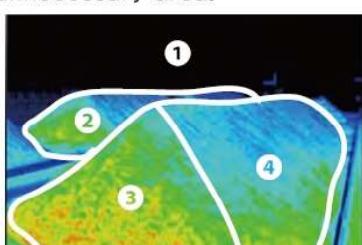


Avoid No Monitoring Time from communication error, by 2 alarm systems both by camera and PC arrangement.

#### Dual alarm system example

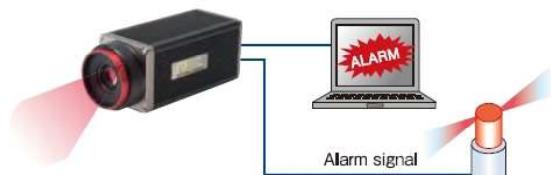

## Interface

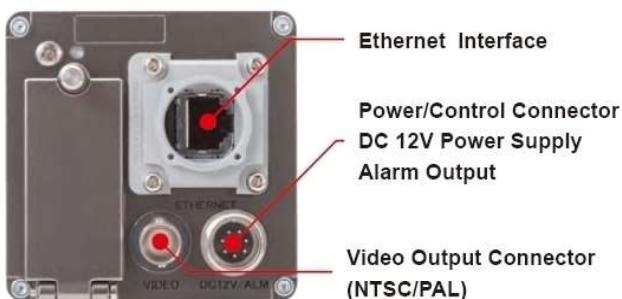


### Pin Assignment of Power / Alarm Contact Connector

(Round Connector Tajimi R04-R8M)

A	Alarm1+	E	+12V±1V	DC Power Supply
B	Alarm1-	F	GND	
C	Alarm2+	G	NUC IN+	External NUC Input
D	Alarm2-	H	NUC IN-	
	Alarm Output			

## Measuring Distance and Field of View

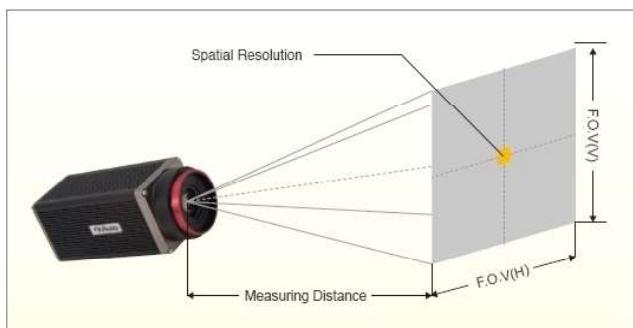

	Measuring Distance (m)	Field of View(H) (m)	Field of View(V) (m)	Minimum Detectable size (mm)
TS610/TS610-D 37.5°(H)×28.1°(V)	10	6.4	4.8	10
TS620/TS620-D 71.2°(H)×53.4°(V)	10	14.1	10.6	22
TS630/TS630-D 90.2°(H)×67.7°(V)	10	19.8	14.9	31

\*Typical data

## Specification

### TS600 series

Type	TS610	TS610-D	TS620	TS620-D	TS630	TS630-D
Frame Rate	30Hz	7.5Hz	30Hz	7.5Hz	30Hz	7.5Hz
Field of View	37.5° × 28.1°		71.2° × 53.4°		90.2° × 67.7°	
Spatial Resolution	1.0mrad		2.2mrad		3.1mrad	

### Specification

Basic Performance	Infrared Detector	UFPA(Microbolometer)
	Spectral Range	8 to 14um
	Measuring Range	-40°C to 1500°C
	Sensitivity(NETD)	0.03°C at 25°C(with S/N improvement)
	Accuracy	±2°C or ±2%(Range1,2)
	Detector Pixels	640(H)×480(V) pixels
	Focus	Pan-focus
Image Display	Auto Function	Auto Scale
	Color Palettes	7 Palettes(Rainbow,Brightness,Hot-white,Hot-black,etc)
	Image Quality Improvement	Denoising,Averaging(OFF / Low / Middle / High, with ghost rejection),Edge enhancement
	Point Temperature	10 Movable Points, Temperature Tracking:MAX/MIN x1 each,Delta T
Measuring Function	Temperature Display in Assigned Area	5 Boxes
	Line Profile	Horizontal,Vertical,Horizontal & Vertical
	Alarm Function	Alarm Display,Color Alarm,Alarm Signal Output 32 Arbitrary shape areas(by using Remote Program)
	Temperature Correction	Emissivity,Multi-point Emissivity, Environmental / Background,Distance,NUC
	Ethernet	100/10BASE-T (RJ-45)
Interface	Protocol	Modbus, ONVIF, TS Protocol
	Video output	NTSC or PAL (BNC)
	Alarm Output	Non-voltage contact
	External NUC Input	1ch
Other	Operating Temperature & Humidity	-15°C to 50°C, 90%RH (non-condensing)
	Storage Temperature & Humidity	-40°C to 70°C, 90%RH (non-condensing)
	AC Power	DC 12V ±1V
	Power Consumption	8W(Typ)
	Dimensions	Approx. 68mm(H)×68mm(W)×175mm(D)
	Weight	Approx. 800g
	Vibration / Shock	19.6m/s²(2G), 147m/s²(15G)
Standard attachment	Dust / Splash Proof	Protection class IP54 equivalent
	Standard attachment	CD-ROM(Manual,Remote Program,NS9500LT,SDK)

■ Listed specifications, appearance and design are subject to change without notice. ■ Company and commodity names are trade names or registered trade marks of each company. ■ NIPPON AVIONICS Co., Ltd. will not be responsible for any damage of infrared detectors due to incoming strong light (e.g. laser) through lens(es). ■ This product is subject to Japanese Export Control Law. Depending on its destination, prior assessment and authorization may be required. When exporting from country of initial purchase destination, please be sure to follow that country's export regulations as it may require an export permit beforehand.



MODBUS messaging in an 'Intranet' or 'Internet' environment using the TCP/IP protocols. The most common use of the protocols at this time are for Ethernet attachment of PLC's, I/O modules, and 'gateways' to other simple field buses or I/O networks



Monitor - control - explore and configure IP cameras



All registered trademarks are proprietary to their owners.



Application Anwendungsbereich	Model Modell					
		1	2	3	4	5
Building Investigation Gebäudethermografie	●	○	●	●	●	
Electrical Thermography Elektrothermografie	●	○	●	●	●	
Medical/Human Body Investigation Medizintechnische Anwendungen	●	○	●	●	○	
Predictive Maintenance Vorbeugende Instandhaltung	●	●	○	○	○	○
Research & Development Forschung & Entwicklung	○	○	●	●	○	○
Automation/Conditional Monitoring Automation/Qualitätssicherung			●	●	●	○
Industrial Process Control Industrielle Prozesskontrolle			●	●	●	○
Surveillance/Rescue Management Fernbeobachtung/Sicherheitstechnik					●	
Traffic Control Verkehrsüberwachung					●	
Furnace/Glass melting industry Brennraum/Glasschmelze						●
Flame- and plastic measurement Flamm- und Folienmessung						●

○ capable geeignet

○ well suitable gut geeignet

● particularly suitable sehr gut geeignet